Teflon™ PTFE Fibers

Flock Fibers

TORAY
Innovation by Chemistry

Product Benefits

- Superior friction control for a variety of bearings
- Widely used for compounding and mixed with plastics and resins
- Extends the life of plastic composites
- Oil-free, low-maintenance ease of use

Physical Properties

Product	Specifications	
	Denier (d)	Cut Length (in)
Cut Length 1/100" to 1/4"	6.7	0.01
	6.7	0.016
	6.7	0.25

Wear Factor Based on ASTM D3702

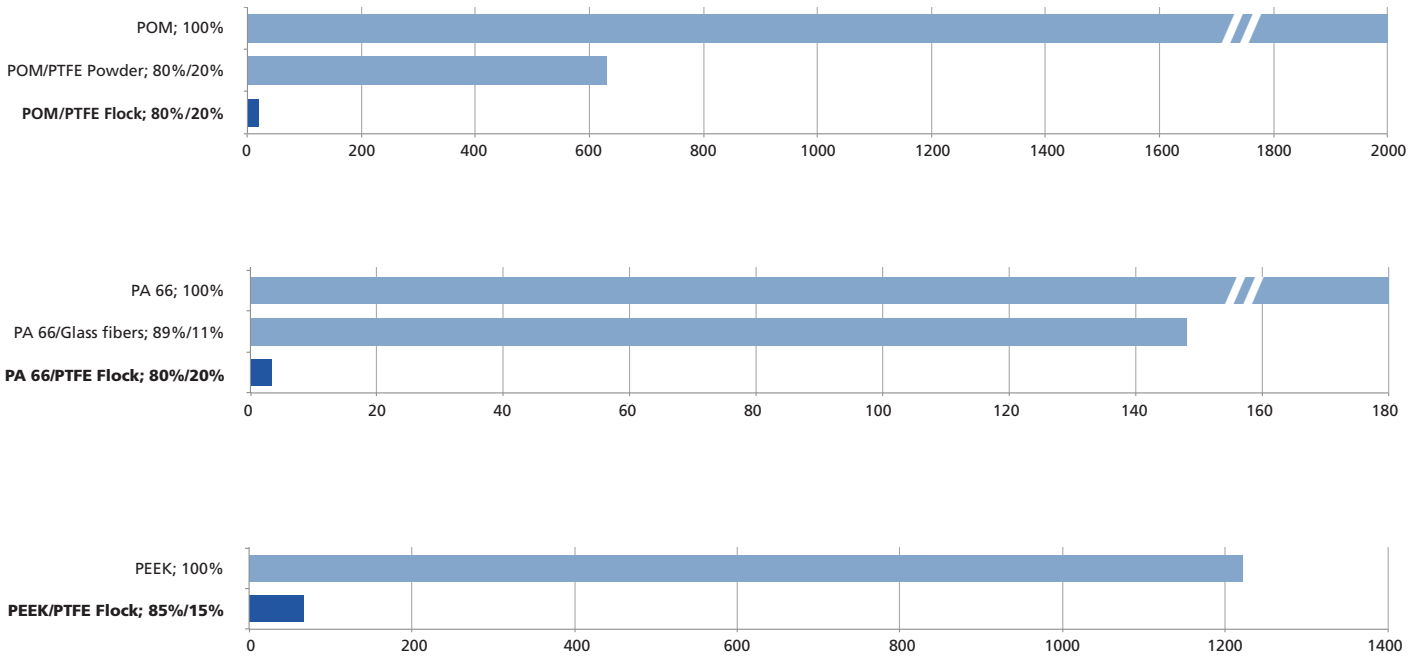

Wear Factor; Shows the Ratio of Wear Volume (Lower Number = Higher Resistance for Wear)

Teflon™ is a registered Trademark of The Chemours Company FC, LLC used under license by Toray Fluorofibers (America), Inc.

Toray Fluorofibers (America), Inc.
2032 Highway 20, Decatur, AL 35601
Tel: 256-260-5900
Fax: 256-260-5910
Email: Sales@TFA.Toray.com
www.torayfluorofibers.com

©2021 Toray Fluorofibers (America), Inc.